TAURUS® series





Working range


Sets blind rivets from 2.4 up to 3.2 mm \varnothing all materials and up to 4 mm Ø alu/steel (max. mandrel dia. 2.5 mm)

Technical data

Weight: 1.3 kg 5-7 bar Operating air pressure: Air hose connection: 6 mm Ø (1/4") Air consumption: approx. 1.0 ltr. per rivet Traction power: 4,200 N at 5 bar Stroke: 15 mm

Equipment

Nosepieces: 17/18, 17/24 and 17/27, maintenance wrench SW12/14, SW14/17, 1 hydraulic oil bottle 100 ml, 1 oil refill can, Operating instructions with spare parts list

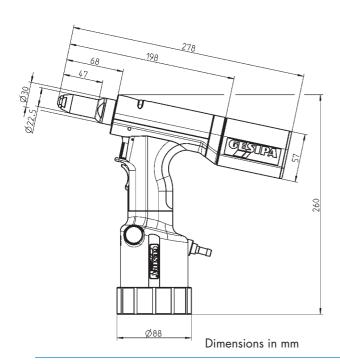

Working range

Sets blind rivets up to 5 mm \varnothing all materials and up to 6 mm Ø alu/steel (max. mandrel dia. 3.2 mm)

Technical data

1.6 kg Weight: 5-7 bar Operating air pressure: Air hose connection: 6 mm Ø (1/4") Air consumption: approx. 2.3 ltr. per rivet

9,000 N at 5 bar Traction power:

Stroke: 18 mm

Equipment

Nosepieces: 17/27, 17/29, 17/32 and 17/36, maintenance wrench SW12/14, SW14/17, 1 hydraulic oil bottle 100 ml,1 oil refill can, Operating instructions with spare parts list

